


**Vinyl board cover is designed specifically for the protection of heavily used surfaces or furniture.**


- Self-sealing surface.
- Will not deteriorate, discolor or crack.
- Easy to clean with a damp cloth.
- Cuts to size easily with ordinary scissors, then attaches with double-sided tape.

### Step 1

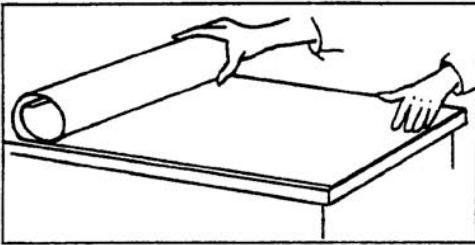


Unroll and lay flat at room temperature for at least **24 hours before** cutting or taping

### Step 2

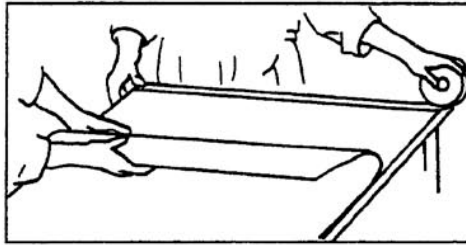

Apply double-sided tape to edge of tabletop

### Step 3

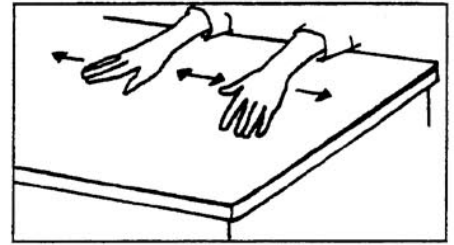

Smooth Vinyl board cover from the center towards the edges to prevent wrinkling

Unroll and lay flat at room temperature for at least **24 hours before** cutting or taping. Apply double-sided tape to edge of tabletop. Smooth Vinyl board cover from the center towards the edges to prevent wrinkling

## INSTALLING:

### 1. Unroll and lay flat for at least 24 hours.

Vinyl board cover is produced and shipped in tension-wound rolls and needs to “relax” before being secured to a surface. For best performance, unroll and lay flat at room temperature for at least 24 hours to allow material to return to its natural, flat state.

### 2. Cut to size.

All Vinyl board cover sheets are shipped slightly oversize to allow for variations in drawing board and tabletop sizes. For best fit it will need to be trimmed down to the exact dimensions of your surface. This can be done either before or after the Vinyl board cover is adhered. Use a very sharp utility knife and a straightedge to ensure accuracy.

### 3. Clean and prepare table surface.

Vinyl board cover board cover is soft and pliable and will conform to the surface beneath. Dirt and tabletop imperfections under the Vinyl board cover will create an uneven work surface. Be sure to remove all particles of dirt and dust before attaching Vinyl board cover. Deep imperfections can be filled with wood filler and sanded smooth.

### 4. Apply 1" wide double-sided tape to table surface.

Leave top liner on tape for time being. For most applications tape only needs to be used along the top edge of the tabletop. For a more secure fit, tape can be applied along the other 3 edges as well. Caution: apply tape along the outer edges only, never in the middle. 1" wide tape is recommended. Use only thin polyester-based tapes for smooth results. Foam-based tapes are too thick and will create a raised surface. Be sure to leave top liner on for time being.

### 5. Position sheet on tabletop.

With the top tape liner still in place, position the Vinyl board cover on the tabletop in its exact location. Then, without moving the sheet, raise back the top edge and peel off the tape liner beneath. Lay the sheet back down and press securely. Smooth Vinyl board cover out from the center to prevent wrinkling before following the same procedure with other tape edges, if so desired.